



**PROLINE  
CDD 50 LED**

# LED INDOOR



HIGH CRI >80  
Technology SMD


## DESCRIPTIONS

The PROLINE Cdd 50 is the new slim and decorative Surface /Pendant LED lighting system that provides an ultra narrow luminaire which can be configured in a multitude and different ways by all concepts. Its clever yet simple design enables the lighting designer to create unique lighting solution without compromising on lighting performance. This family can be installed individually or as a continuous line.


## APPLICATIONS

Offices, meeting rooms, conference halls other similar applications

## PHOTOMETRIC DATA



## DIMENSIONS



## SPECIFICATIONS


Mounting	Ceiling Surface /Pendant
Lamp type	LED SMD chips
Voltage rating/ freq.	220-240V / 50-60 Hz
Driver	Integrated Constant Current LED driver
Power factor	>0.95
Degree of protection	IP 40
Light controller	Opal PMMA diffuser
Standard color temp.	3000K/4000K/6500K
Operating temperature	-10 : 40°C
Rated lifetime (L70)	50,000 Hrs (@25C°)
Housing	Extruded aluminum with die cast aluminum end caps

CODE	Wattage	Lumin	IP Rate	Standard Color Temp.	L	W	H
ProLine Cdd 50 12W LED	12W	1200LM	IP40	4000K	610	50	75
ProLine Cdd 50 12W LED	12W	2400LM	IP40	4000K	1210	50	75
ProLine Cdd 50 24W LED	24W	2400LM	IP40	4000K	1210	50	75
ProLine Cdd 50 36W LED	36W	3600LM	IP40	4000K	1210	50	75

## OPTIONS:

- Dimmable Driver 1 -10 / DALI
- Backup Emergency Kit 1H/3H (Remote Box)

## ACCESSORIES

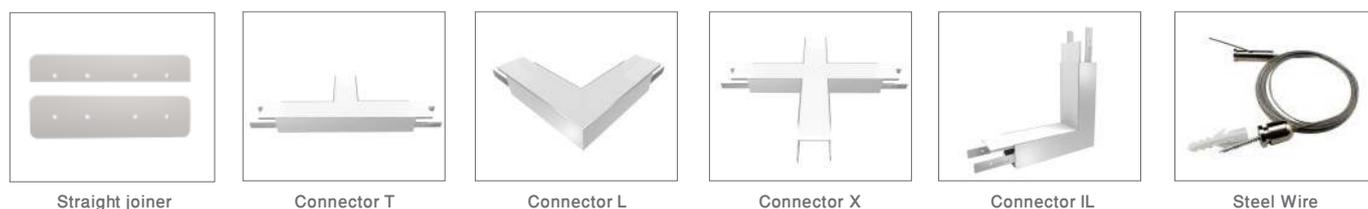

#### **Head office**

Malaz - Salahidin Road  
P.O Box 1246 Riyadh 11431

Tel : +966 11 4777 700  
Fax: +966 11 4789 469

#### **Western Region Office**

Tahliya Street  
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888  
Fax: +966 12 6633413

#### **Eastern Region Office**

King Abdulaziz Street  
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509  
Fax: +966 13 8329065

[ContactUs@noortek.com](mailto:ContactUs@noortek.com)



**[www.noortek.com](http://www.noortek.com)**