



RECESSED

INDIRECT CFL MESH

RECESSED

INDIRECT CFL MESH



SPECIFICATIONS :

Mounting	: Ceiling recessed
Lamp type	: T5 / TC-L
Lamp holder	: G5 / 2G11
Control gear type	: Electronic
Voltage rating/ freq.	: 220-240V / 50-60 Hz
Power factor	: >0.95
Degree of protection	: IP 20
Internal wiring	: 0.5 mm sq. solid copper wire, PVC 105 deg C
Cable entry	: 16mm dia. hole on bottom of the housing
Cable connection	: Terminal block, 3-pole, screw type with grounding
Conformity	: IEC 60598 / SASO 1318
Light controller	: Mesh cover

DESCRIPTIONS : Indirect CFL mesh is a recessed luminaire of 0.6 mm steel housing finished with 3-stages pretreatment electrostatic powder coating. This luminaire is used for creating task / ambient lighting effect. The aluminum optic is used with purity higher than 99%. and reflectance higher than 80%. Energy efficiency is obtained using an electronic ballast with PF higher than 0.95.

APPLICATIONS : Offices, lobby, corridors, reception and hallways.

CODE	L	W	H
REC-T5-2X14WE/F/CSM [IND]	596	596	100
REC-T5-2X24WE/F/CSM [IND]	596	596	100

CODE	L	W	H
REC-TC-L-2X40WE/F/CSM [IND]	596	596	100
REC-TC-L-2X55WE/F/CSM [IND]	596	596	100





 50/60 Hz

OPTIONS:

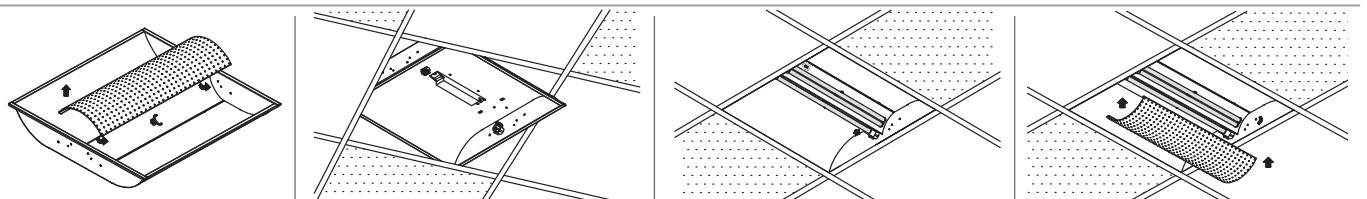
- Gear (DIM) [DALI]
- Emergency Kit (EM1.5) [EM3]

Ordering Example

Product category	REC	Lamp type	T5	Configuration	1X14W	Housing type	E	Optic structure	/	Gear type	CSM	IND
------------------	-----	-----------	----	---------------	-------	--------------	---	-----------------	---	-----------	-----	-----



Mounting System



Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 477 77 00
Fax: +966 11 478 94 69

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com