



# DOWNLIGHTS

WALL WASH 8"

# DOWNLIGHTS

WALL WASH 8"



## SPECIFICATIONS :

Mounting	: Ceiling recessed
Lamp type	: CFL
Lamp holder	: G24q
Control gear type	: Electronic
Voltage Rating/ Freq.	: 220-240V / 60 Hz
Degree of protection	: IP 20
Internal Wiring	: 0.5 mm sq. solid copper wire PVC 105 deg C
Cable entry	: 16mm dia. hole on bottom of the housing
Cable connection	: Terminal block, 3-pole, screw type with grounding
Conformity	: IEC 60598 / SASO 1318
Light controller	: CTG

**DESCRIPTIONS :** WALL WASH 8" Round is a recessed luminaire of die casted aluminum finished with 3-stages pretreatment electrostatic powder coating. The trim is made of die casted aluminium. The aluminum optic is used with purity higher than 99% and reflectance higher than 80%. Energy efficiency is obtained using an electronic transformer.



**APPLICATIONS :** Decorative lighting scenes in shops, malls and fancy offices.

CODE	D	H
DLR[8"]-CFL-2X18WE/CA [WH] [WW]	220	172
DLR[8"]-CFL-2X26WE/CA [WH] [WW]	220	172


### OPTIONS:

- Gear [DIM]
- Emergency Kit [EM1.5] [EM3]
- Reflector [ASSY]
- Trim Color [WH] [BR] [CR] [AU] [NI] [SI]

### Ordering Example

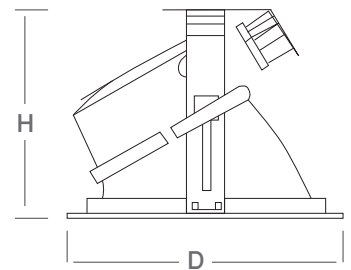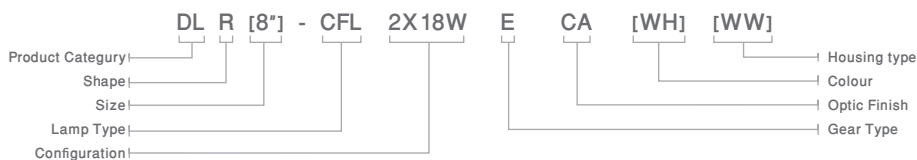

### Mounting System

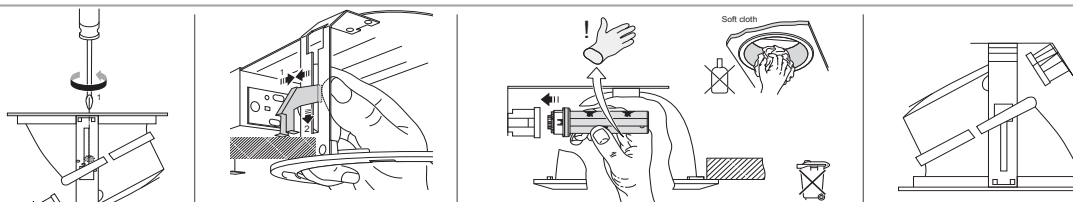

### **Head office**

Malaz - Salahidin Road  
P.O Box 1246 Riyadh 11431

Tel : +966 11 477 77 00  
Fax: +966 11 478 94 69

### **Western Region Office**

Tahliya Street  
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888  
Fax: +966 12 6633413

### **Eastern Region Office**

King Abdulaziz Street  
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509  
Fax: +966 13 8329065

ContactUs@noortek.com



**www.noortek.com**