RECESSED

CHANELUX T5

Trimm/Trimless

Noortek

More Light

RECESSED

CHANELUX T5

SPECIFICATIONS :

Mounting	:	Ceiling recessed
Lamp type	:	T5
Lamp holder	:	G5
Control gear type	:	Electronic
Voltage rating/ freq.	:	220-240V / 50-60 Hz
Power factor	:	>0.95
Degree of protection	:	IP 40
Internal wiring	:	0.5 mm sq. solid copper wire, PVC 105 deg C
Cable entry	:	16mm dia. hole on bottom of the housing
Cable connection	:	Terminal block, 3-pole, screw type with grounding
Conformity	:	IEC 60598 / SASO 1318
Light controller	:	CD

DESCRIPTIONS :

CHANELUX T5 is a Trim continuous recessed uminaire of 0.6 mm steel housing finished with 3-stages pretreatment electrostatic powder coating. Plastic diffuser material is PMMA. Energy efficiency is obtained using electronic ballast with PF higher than 0.95.

APPLICATIONS :

Offices, meeting rooms and conference halls.

CODE	L	W	H
BAT-T5-1X14WE-F/CD[trim]	575	90	90
BAT-T5-2X14WE-F/CD[trim]	575	90	90
BAT-T5-1X28WE-F/CD[trim]	1175	90	90
BAT-T5-2X28WE-F/CD[trim]	1175	90	90

OPTIONS:
- Gear [DIM] [DALI]
- Emergency Kit [EM1.5] [EM3]

linear | IP 40 | G5 | 220V 240V 50/60 Hz

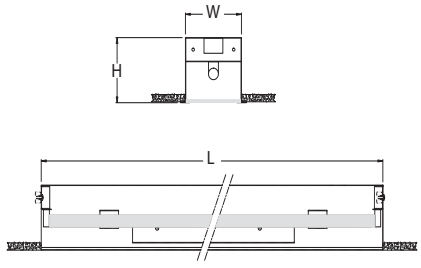

Ordering Example

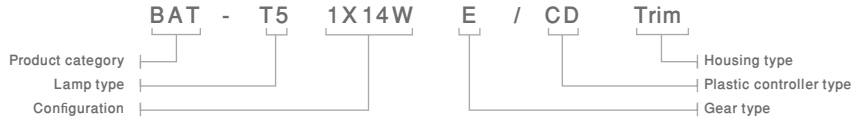

Mounting System

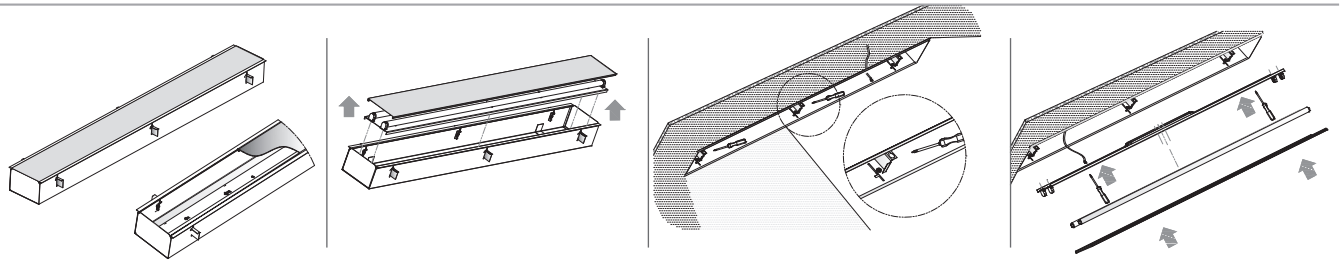

Noortek

RECESSED

CHANELUX T5

SPECIFICATIONS :

Mounting	:	Ceiling recessed
Lamp type	:	T5
Lamp holder	:	G5
Control gear type	:	Electronic
Voltage rating/ freq.	:	220-240V / 50-60 Hz
Power factor	:	>0.95
Degree of protection	:	IP 40
Internal wiring	:	0.5 mm sq. solid copper wire, PVC 105 deg C
Cable entry	:	16mm dia. hole on bottom of the housing
Cable connection	:	Terminal block, 3-pole, screw type with grounding
Conformity	:	IEC 60598 / SASO 1318
Light controller	:	CD

DESCRIPTIONS :

CHANELUX T5 is a Trimless continuous recessed luminaire of 0.6 mm steel housing finished with 3-stages pretreatment electrostatic powder coating. Plastic diffuser material is PMMA. Energy efficiency is obtained using electronic ballast with PF higher than 0.95.

APPLICATIONS :

Offices, meeting rooms and conference halls.

CODE	L	W	H
BAT-T5-1X14WE-F/CD [trimless]	575	575	575
BAT-T5-2X14WE-F/CD [trimless]	575	575	575
BAT-T5-1X28WE-F/CD [trimless]	1175	1175	1175
BAT-T5-2X28WE-F/CD [trimless]	1175	1175	1175

OPTIONS:
- Gear [DIM] [DALI]
- Emergency Kit [EM1.5] [EM3]

linear | IP 40 | G5 | 220V 240V 50/60 Hz

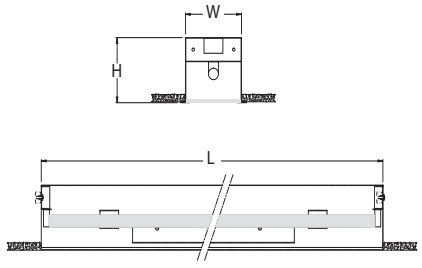

Ordering Example

BAT - T5 1X14W E / CD Trimless

- BAT - Product category
- T5 - Lamp type
- 1X14W - Configuration
- E - Gear type
- CD - Plastic controller type
- Trimless - Housing type

Mounting System

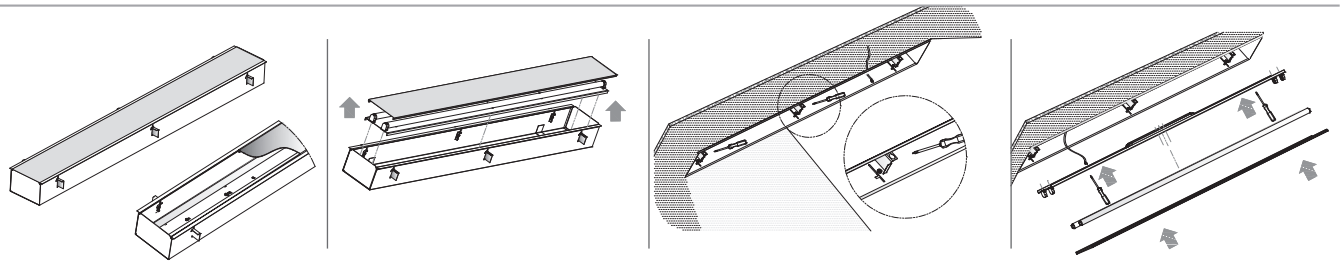

Noortek

Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 477 77 00
Fax: +966 11 478 94 69

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com

www.noortek.com