



DOWNLIGHTS

HALUX 2"ROUND

DOWNLIGHTS

NCM 430 SERIES



SPECIFICATIONS :


Mounting	: Ceiling mounted
Lamp type	: CFL
Lamp holder	: G24q
Control gear type	: Electronic
Voltage Rating/ Freq.	: 220-240V / 50-60 Hz
Power factor	: >0.95
Degree of protection	: IP65
Internal Wiring	: 0.5 mm sq. solid copper wire PVC 105 deg C
Cable entry	: 16mm dia. holes at the bottom of the housing
Cable connection	: Terminal block, 3-pole, screw type with grounding
Conformity	: IEC 60598 / SASO 1318
Light controller	: Opal diffuser

DESCRIPTIONS : NCM 430 series Round IP65 is a surface mounted luminaire of flame resistant white polycarbonate (PC) housing. The opal dome cover is made of UV resistant PMMA. It offers complete protection from dust and jetting water. Energy efficiency is obtained using an Electronic Ballast with PF higher than 0.95.


APPLICATIONS : Stairs, corridors , concrete ceiling and multi-purposes halls.

CODE	D	H	CODE	D	H
NCM 430-CFL-2x18WE [IP65]	430	168	NCM 430-CFL-40W-TS [IP65]	430	168
NCM 430-CFL-2x26WE [IP65]	430	168	NCM 430-CFL-55W-TS [IP65]	430	168

OPTIONS:
 - Lamp holders (E27)
 - Emergency Kit (EM1.5) (EM3)

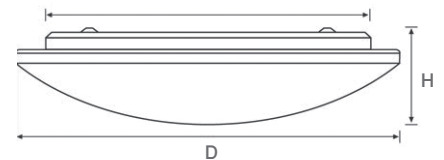

Ordering Example



Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 477 77 00
Fax: +966 11 478 94 69

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com