



# LOW BAY

HIB05 IP55



### SPECIFICATIONS :

Mounting	: Ceiling / wall mounted
Lamp type	: HID
Lamp holder	: E27
Control gear type	: Electronic
Voltage Rating/ Freq.	: 220-240V / 50-60 Hz
Power factor	: >0.95
Degree of protection	: IP 55
Internal Wiring	: 1.5 mm sq. stranded copper wire, heat resistant 130 deg C
Cable entry	: Cable gland at the bottom of the housing
Cable connection	: Terminal block, 3-pole, screw type with grounding
Conformity	: IEC 60598 / SASO 1318
Light controller	: PC diffuser


**DESCRIPTIONS :** LOW BAY IP65 is made of high pressure die casted aluminum housing. It offers high ingress protection against dust and jetting water. The dffuser is made of PC material that offers vandal protection. It is used for low ceiling applications and comes with a conventional ballast. The aluminum optic used has purity higher than 99% and Reflectance Higher than 80%.

**APPLICATIONS :** Warehouses, assembly areas, gyms, hangars, transportation garages, loading areas and other similar applications


CODE	L	W	H
HIB05-70WC/MH PC [IP55]	315	210	315
HIB05-150WC/MH PC [IP55]	315	210	315

### OPTIONS:

- Gear (DIM) [DALI]
- Emergency Kit (EM1.5) [EM3]
- Aluminium [ALU]

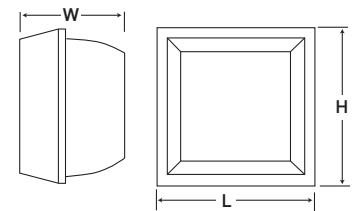

### Ordering Example

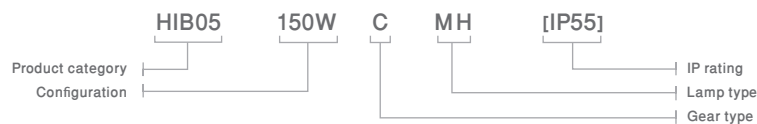

### **Head office**

Malaz - Salahidin Road  
P.O Box 1246 Riyadh 11431

Tel : +966 11 477 77 00  
Fax: +966 11 478 94 69

### **Western Region Office**

Tahliya Street  
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888  
Fax: +966 12 6633413

### **Eastern Region Office**

King Abdulaziz Street  
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509  
Fax: +966 13 8329065

ContactUs@noortek.com



**[www.noortek.com](http://www.noortek.com)**