



BATTENS

INDUSTRIAL BATTEN IP23 T5/T8

BATTENS

INDUSTRIAL BATTEN IP23 T5/T8



SPECIFICATIONS :

Mounting	: Surface Mounted (Ceiling / Wall)
Lamp type	: T8/T5
Lamp holder	: G13/G5
Control gear type	: Electronic
Voltage Rating/ Freq.	: 220-240V / 50-60 Hz
Power factor	: >0.95
Degree of protection	: IP 23
Internal Wiring	: 0.5 mm sq. solid copper wire, PVC 105 deg C .
Cable entry	: 16mm diam hole at the end/bottom of the housing
Cable connection	: Terminal block, 3-pole, screw type with grounding
Conformity	: IEC 60598 / SASO 1318
Optical system	: WR

DESCRIPTIONS : BATTEN IP 23 T5/T8 is a surface mounted industrial luminaire of 0.6 mm steel housing finished with 3-stages pretreatment electrostatic powder coating. It offers limited ingress protection against dust and water. It is available with a white powder coated reflector. LOR reaches up to 91%. DIAL certified photometry. Energy efficiency is obtained using an electronic ballast with PF higher than 0.95.

APPLICATIONS : Cove lights applications.


CODE	L	W	H	CODE	L	W	H
BAT-T8-1X18WE/WR [IP23]	630	262	148	BAT-T5-1X14WE/WR [IP23]	590	262	148
BAT-T8-2X18WE/WR [IP23]	630	262	148	BAT-T5-2X14WE/WR [IP23]	590	262	148
BAT-T8-1X36WE/WR [IP23]	1240	262	148	BAT-T5-1X28WE/WR [IP23]	1190	262	148
BAT-T8-2X36WE/WR [IP23]	1240	262 <td 148	BAT-T5-2X28WE/WR [IP23]	1190	262	148	

OPTIONS:


- Gear [DIM] (DALI)
- Emergency Kit [EM1.5] (EM3)
- Aluminium (ALU)



Ordering Example

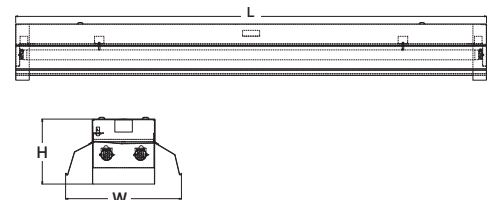

Mounting System

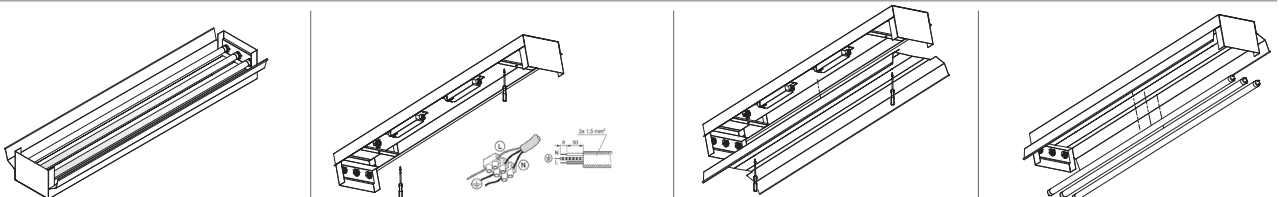

Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 477 77 00
Fax: +966 11 478 94 69

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com