



EXIT SIGN

STANDARD EM1 IP 65

EXIT SIGN

STANDARD EM1 IP 65

WALL/CEILING



SPECIFICATIONS :

Mounting	: Wall/ceiling mounted
Lamp Configuration	: 8W T5
Lamp holder	: G5
Control Gear Type	: EM Backup Kit HF Electronic Ballast
Operating Mode	: Maintain / Non Maintain
Voltage Rating/ Freq.	: 220-240V / 50-60 Hz
Degree of protection	: IP 65
Internal Wiring	: 0.5 mm sq solid copper wire PVC 105 deg C
Cable entry	: Side or rear cable entry
Cable connection	: Terminal block, 3-pole, screw type
Conformity	: IEC 60598 / SASO 1318


DESCRIPTIONS : EXITEK STANDARD EM1 IP 65 is a wall/ceiling mounted exit/emergency light of polycarbonate housing with Non-Maintained (NM) 3 hrs emergency kit (1.5 Hr. as option). This type is suitable for all types of walls and ceilings.

APPLICATIONS : Schools, offices and passages, hospitals, parking and malls


CODE	L	W	H
EM1 [WAL / PC] NM-3hr T5-1X8W - [IP 65]	365	110	75

OPTIONS:

- Emergency duration for 1.5 Hrs.
- High frequency (HF) electronic control gear for central battery systems (CBS) compatibility
- Exit legend (as per below selections)



Ordering Example

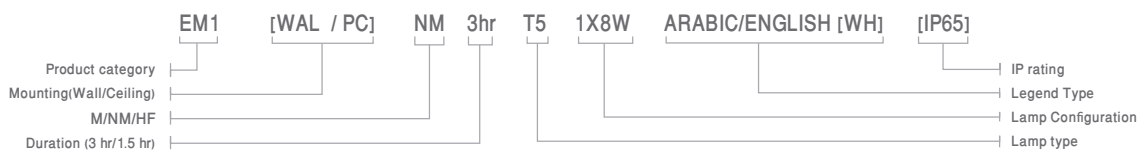

Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 477 77 00
Fax: +966 11 478 94 69

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com