



SURFACE MOUNTED

FULL WRAP T8/T5 Opal

SURFACE MOUNTED

FULL WRAP T8/T5 Opal



SPECIFICATIONS :

Mounting	: Ceiling mounted
Lamp type	: T8/T5
Lamp holder	: G13/G5
Control gear type	: Electronic
Voltage rating/ freq.	: 220-240V / 50-60 Hz
Power factor	: >0.95
Degree of protection	: IP 54
Internal wiring	: 0.5 mm sq. solid copper wire, PVC 105 deg C
Cable entry	: 16mm dia. hole on bottom of the housing
Cable connection	: Terminal block, 3-pole, screw type with grounding
Conformity	: IEC 60598 / SASO 1318
Light controller	: Opal diffuser (CD)

DESCRIPTIONS : FULL WRAP AROUND T5/T8 OPAL/PRISMATIC is a ceiling mounted luminaire of 0.6 mm steel housing finished with 3-stages pre-treatment electrostatic powder coating. Plastic diffuser material is PMMA. Energy efficiency is obtained using electronic ballast with PF higher than 0.95.

APPLICATIONS : Corridors and staircases.

CODE	L	W	H
F-WRR-T8-1X58WE/CD [Full]	1570	106	95
F-WRR-T8-2X58WE/CD [Full]	1570	190	91
F-WRR-T8-1X36WE/CD [Full]	1270	106	95
F-WRR-T8-1X36EW/CD [Full]	1270	190	91


CODE	L	W	H
F-WRR-T5-1X28WE/CD [Full]	1270	106	95
F-WRR-T5-2X28WE/CD [Full]	1270	190	91
F-WRR-T5-1X35WE/CD [Full]	1570	106	95
F-WRR-T5-2X35WE/CD [Full]	1570	190	91

OPTIONS:


- Gear (DIM) (DALI)
- Emergency Kit (EM1.5) (EM3)
- Prismatic diffuser is available (CP)



Ordering Example

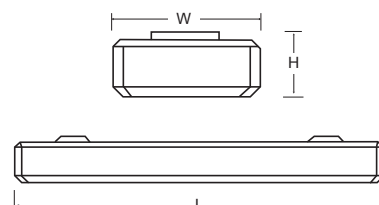

Mounting System

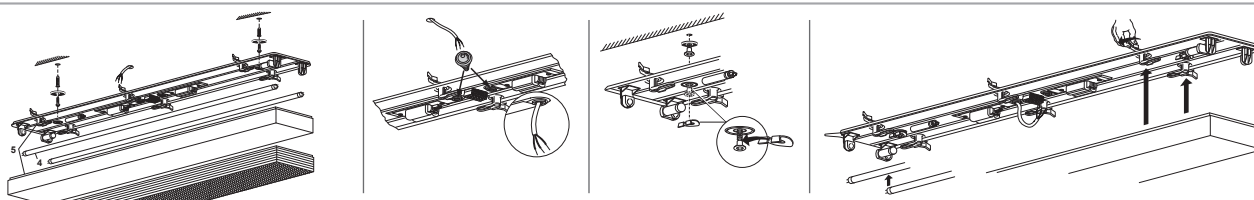

Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 477 77 00
Fax: +966 11 478 94 69

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com