


**PROLINE
CD 90 LED**

LED INDOOR

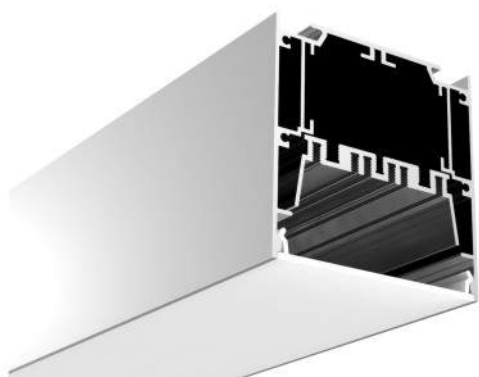


DESCRIPTIONS

The PROLINE Cd 90 is the new slim Surface /Pendant LED lighting system that provides an ultra narrow luminaire which can be configured in a multitude and different ways by all concepts. Its clever yet simple design enables the lighting designer to create unique lighting solution without compromising on lighting performance. This family can be installed individually or as a continuous line.


APPLICATIONS

Offices, meeting rooms, conference halls other similar applications

PHOTOMETRIC DATA

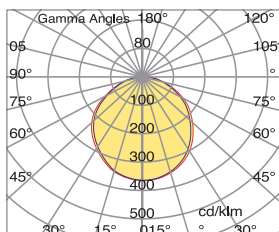

DIMENSIONS

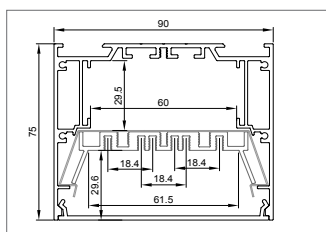

SPECIFICATIONS


Mounting	Ceiling Surface /Pendant
Lamp type	LED SMD chips
Voltage rating/ freq.	220-240V / 50-60 Hz
Driver	Integrated Constant Current LED driver
Power factor	>0.95
Degree of protection	IP 40
Light controller	Opal PMMA diffuser
Standard color temp.	3000K/4000K/6500K
Operating temperature	-10 : 40°C
Rated lifetime (L70)	50,000 Hrs (@25C°)
Housing	Extruded aluminum with die cast aluminum end caps

CODE	Wattage	Lumin	IP Rate	Standard Color Temp.	L	W	H
ProLine Cd 90 12W LED	12W	1200LM	IP40	4000K	610	90	75
ProLine Cd 90 24W LED	24W	2400LM	IP40	4000K	1210	90	75
ProLine Cd 90 36W LED	36W	3600LM	IP40	4000K	1210	90	75
ProLine Cd 90 50W LED	50W	5000LM	IP40	4000K	1210	90	75

OPTIONS:

- Dimmable Driver 1 - 10 / DALI
- Backup Emergency Kit 1H/3H (Remote Box)

ACCESSORIES

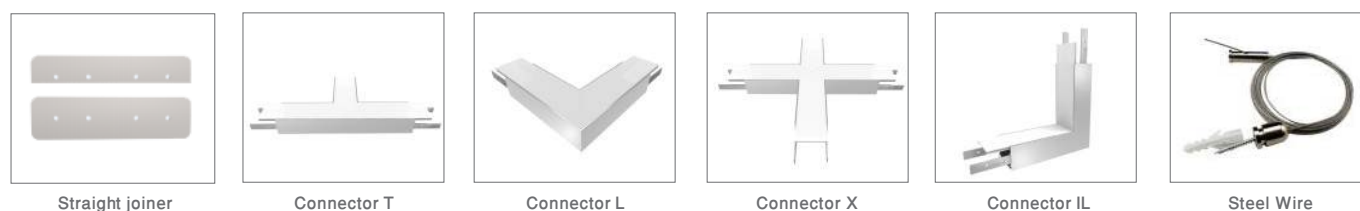

Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 4777 700
Fax: +966 11 4789 469

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com