



TYPE A



TYPE B

LED BOLLARD

BOLED 02X

LED BOLLARD



TYPE A



TYPE B



DESCRIPTIONS :

BOLED 02 series provide a professional lighting solution for residential and architectural lighting. Its die cast aluminium body, featuring high IK rating, protects all the fragile elements of the optics (light source, reflector, diffuser) from any external mechanical impacts.

APPLICATIONS :

For commercial buildings, hospitals, yards, parks and walkways.




SPECIFICATIONS

Housing	Extruded aluminum tube with die cast aluminum head
LED module type	LED COB
Voltage rating/ freq.	220-240V / 50-60 Hz
Driver	Integrated Electronic LED Driver
Degree of protection	IP65
Optical configuration	Clear PC
Finish	Black, White & Graphite
Diffuser	Transparent polycarbonate UV-stabilizer
Standard color temp.	3000K, 4000K, 6000K
Rated lifetime (L70)	50,000 hrs.

CODE	Wattage	Lumin	IP Rate	CCT	D	H
BOLED 02A - IP65	10W - 25W	750 - 1875	IP65	3K/4K/6.5K	160	500
BOLED 02B - IP65	10W - 35W	750 - 2625	IP65	3K/4K/6.5K	160	500

OPTIONS :

- Standard electronic driver
- Dimming driver 1-10V
- DALI
- Avilable Height (500-800) mm

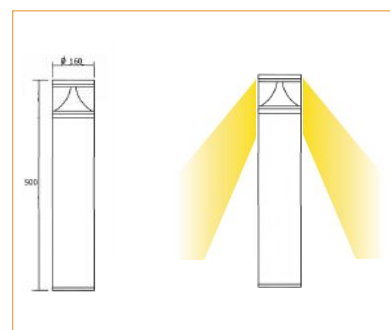

Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 4777 700
Fax: +966 11 4789 469

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com