



# **SURFACE MOUNTED**

**SURFCO T5**



### SPECIFICATIONS :

|                       |  |
|-----------------------|--|
| Mounting              | : Ceiling mounted                                      |
| Lamp type             | : T5   |
| Lamp holder           | : G5   |
| Control gear type     | : Electronic   |
| Voltage rating/ freq. | : 220-240V / 50-60 Hz                                  |
| Power factor          | : >0.95  |
| Degree of protection  | : IP 40/44   |
| Internal wiring       | : 0.5 mm sq. solid copper wire,<br>PVC 105 deg C       |
| Cable entry           | : 16mm dia. hole on bottom of the<br>housing           |
| Cable connection      | : Terminal block, 3-pole, screw type<br>with grounding |
| Conformity            | : IEC 60598 / SASO 1318                                |
| Light controller      | : CP /CD   |

**DESCRIPTIONS :** SURFCO T5 is a ceiling mounted luminaire of 0.6 mm steel housing finished with 3-stages pretreatment electrostatic powder coating. Plastic diffuser material is PMMA. High ingress protection degree (IP40 / 44) is available to be used in wet areas. Energy efficiency is obtained using electronic ballast with PF higher than 0.95.

**APPLICATIONS :** Hospitals, commercial corridors and malls.


| CODE                      | L   | W   | H  |
|---------------------------|-----|-----|----|
| SUR-T5-2X14WE-F/CP [IP40] | 600 | 300 | 70 |
| SUR-T5-2X14WE-F/CD [IP40] | 600 | 300 | 70 |
| SUR-T5-2X14WE-F/CP [IP44] | 600 | 300 | 70 |
| SUR-T5-2X14WE-F/CD [IP44] | 600 | 300 | 70 |

| CODE                      | L    | W   | H  |
|---------------------------|------|-----|----|
| SUR-T5-2X28WE-F/CP [IP40] | 1200 | 300 | 70 |
| SUR-T5-2X28WE-F/CD [IP40] | 1200 | 300 | 70 |
| SUR-T5-2X28WE-F/CP [IP44] | 1200 | 300 | 70 |
| SUR-T5-2X28WE-F/CD [IP44] | 1200 | 300 | 70 |


**OPTIONS:**  
 - Gear [DIM] [DALI]  
 - Emergency Kit [EM1.5] [EM3]



### Ordering Example

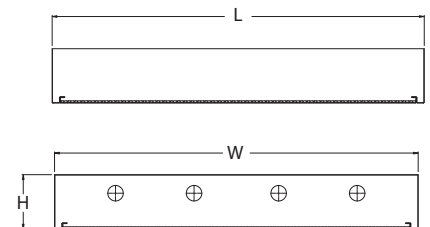

### Mounting System

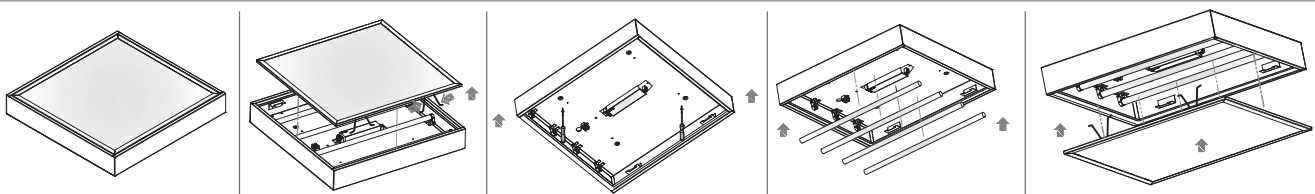

# SURFACE MOUNTED

SURFCO T5



## SPECIFICATIONS :

|                       |  |
|-----------------------|--|
| Mounting              | : Ceiling mounted                                      |
| Lamp type             | : T5   |
| Lamp holder           | : G5   |
| Control gear type     | : Electronic   |
| Voltage rating/ freq. | : 220-240V / 50-60 Hz                                  |
| Power factor          | : >0.95  |
| Degree of protection  | : IP 40/44   |
| Internal wiring       | : 0.5 mm sq. solid copper wire,<br>PVC 105 deg C       |
| Cable entry           | : 16mm dia. hole on bottom of the<br>housing           |
| Cable connection      | : Terminal block, 3-pole, screw type<br>with grounding |
| Conformity            | : IEC 60598 / SASO 1318                                |
| Light controller      | : CP /CD   |

**DESCRIPTIONS :** SURFCO T5 is a ceiling mounted luminaire of 0.6 mm steel housing finished with 3-stages pretreatment electrostatic powder coating. Plastic diffuser material is PMMA. High ingress protection degree (IP40 / 44) is available to be used in wet areas. Energy efficiency is obtained using electronic ballast with PF higher than 0.95.

**APPLICATIONS :** Hospitals, Commercial Corridors and Malls.

| CODE                        | L   | W   | H  |
|-----------------------------|-----|-----|----|
| SUR-T5-3/4X14WE-F/CP [IP40] | 600 | 600 | 70 |
| SUR-T5-3/4X14WE-F/CD [IP40] | 600 | 600 | 70 |
| SUR-T5-3/4X14WE-F/CP [IP44] | 600 | 600 | 70 |
| SUR-T5-3/4X14WE-F/CD [IP44] | 600 | 600 | 70 |


| CODE                        | L    | W   | H  |
|-----------------------------|------|-----|----|
| SUR-T5-3/4X28WE-F/CP [IP40] | 1200 | 600 | 70 |
| SUR-T5-3/4X28WE-F/CD [IP40] | 1200 | 600 | 70 |
| SUR-T5-3/4X28WE-F/CP [IP44] | 1200 | 600 | 70 |
| SUR-T5-3/4X28WE-F/CD [IP44] | 1200 | 600 | 70 |

**OPTIONS:**


- Gear [DIM] [DALI]
- Emergency Kit [EM1.5] [EM3]



### Ordering Example

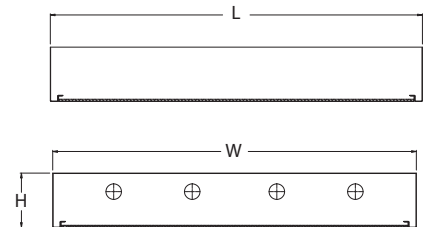

### Mounting System

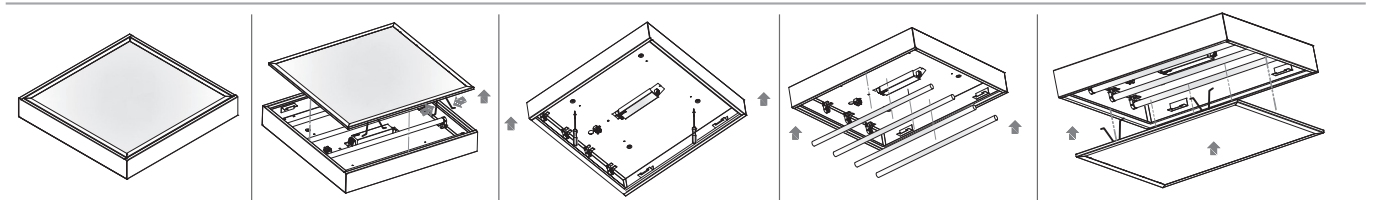

### **Head office**

Malaz - Salahidin Road  
P.O Box 1246 Riyadh 11431

Tel : +966 11 477 77 00  
Fax: +966 11 478 94 69

### **Western Region Office**

Tahliya Street  
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888  
Fax: +966 12 6633413

### **Eastern Region Office**

King Abdulaziz Street  
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509  
Fax: +966 13 8329065

ContactUs@noortek.com



**[www.noortek.com](http://www.noortek.com)**