



LOW BAY

HIB06 IP65



SPECIFICATIONS :

Mounting	: Ceiling
Lamp type	: HID
Lamp holder	: E40
Control gear type	: Conventional
Voltage Rating/ Freq.	: 220-240V / 50-60 Hz
Power factor	: >0.9
Degree of protection	: IP 65
Internal Wiring	: 1.5 mm sq. stranded copper wire, heat resistant 130 deg C
Cable entry	: At the bottom of the housing
Cable connection	: Terminal block, 3-pole, screw type with grounding
Conformity	: IEC 60598 / SASO 1318
Light controller	: Clear tempered protection glass

DESCRIPTIONS : LOW BAY IP65 is made of high pressure die casted aluminum housing. It offers high ingress protection against dust and jetting water. It is used for low ceilings applications and comes with a conventional ballast. The aluminum optic used has purity higher than 99% and Reflectance Higher than 80%.



APPLICATIONS : Warehouses, assembly areas, gyms, hangars, transportation garages, loading areas and other similar applications

CODE	L	W	H
HIB06-250WC/MH [IP65]	420	420	179
HIB06-400WC/MH [IP65]	420	420	179


OPTIONS:

- Gear [DIM] (DALI)
- Emergency Kit [EM1.5] (EM3)
- Aluminium [ALU]

Ordering Example

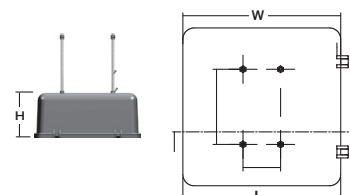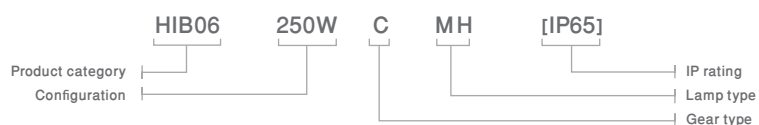

Mounting System

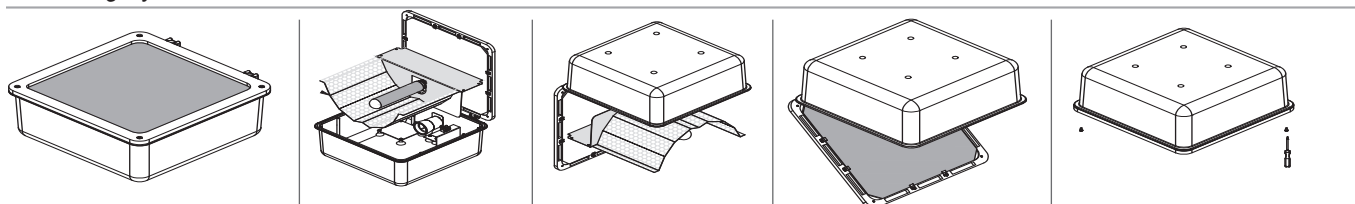

Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 477 77 00
Fax: +966 11 478 94 69

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com