



LED-D8X
IP65

LED DOWNLIGHT



DESCRIPTIONS :

The D8X is a Recessed LED downlight series with high quality die-cast aluminum body in powder-coated, equipped with deep cone for anti-glare, 40°/ 60° reflector, available in different trims and reflectors. Excellent heat sink capability to minimize the luminous degradation, remote LED driver.

APPLICATIONS :

Wet locations, swimming pools, under canopy etc.




GENERAL SPECIFICATIONS :

Mounting	Ceiling recessed
Housing	Die casted aluminum
LED module type	COB LED chips
Voltage rating/ freq.	220-240V / 50-60 Hz (127-277V upon request)
Control gear type	Remote electronic LED driver
Beam Angle	40°/ 60°
Standard color temp.	4000K
Light controller	Clear protection tempered glass
Degree of protection	IP65
Rated lifetime (L70)	50,000 Hrs (@25C°)

CODE	Wattage	Lumin	IP Rate	Color Temp.		Ø	H
LED-D81-8W/4K	8W	760LM	IP65	3K/4K/6.5K	178	109	63

SPECIFICATIONS :


Light source : COB LED chips
 Beam angle : 40°/ 60°
 Light output : 760 LM
 Driver type : Constant current LED driver
 Power consumption : Max 8 W

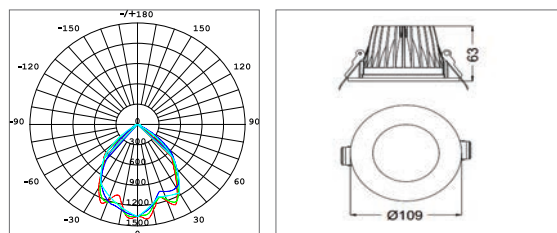

CODE	Wattage	Lumin	IP Rate	Color Temp.		Ø	H
LED-D82-15W/4K	15W	1500LM	IP65	3K/4K/6.5K	178	139	72

SPECIFICATIONS :

Light source : COB LED Chips
 Beam angle : 40°/ 60°
 Light output : 1500 LM
 Driver type : Constant current LED driver
 Power consumption : Max 15 W

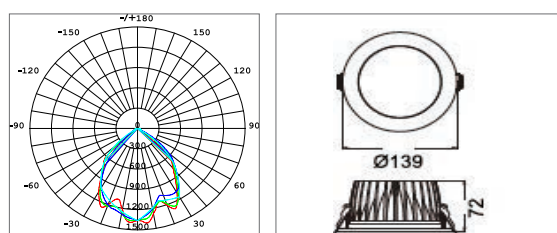


LED DOWNLIGHT

CODE	Wattage	Lumin	IP Rate	Color Temp.		Ø	H
LED-D83-25W/4K	25W	2500LM	IP65	3K/4K/6.5K	178	191	92

SPECIFICATIONS :


- Light source : COB SMD LED chips
- Beam angle : 40°/ 60°
- Light output : 2500 LM
- Driver type : Constant current LED driver
- Power consumption : Max 25 W

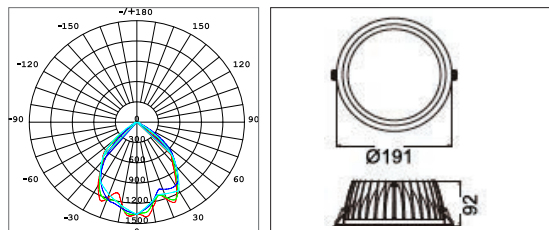


CODE	Wattage	Lumin	IP Rate	Color Temp.		Ø	H
LED-D84-30W/4K	30W	3000LM	IP65	3K/4K/6.5K	178	191	92

SPECIFICATIONS :


- Light source : COB LED chips
- Beam angle : 40°/ 60°
- Light output : 3000 LM
- Driver type : Constant current LED driver
- Power consumption : Max 30 W

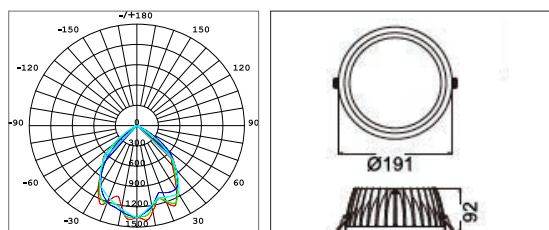

CODE	Wattage	Lumin	IP Rate	Color Temp.		Ø	H
LED-D85-40W/4K	40W	4000LM	IP65	3K/4K/6.5K	178	230	92

SPECIFICATIONS :


- Light source : COB LED chips
- Beam angle : 40°/ 60°
- Light output : 4000 LM
- Driver type : Constant current LED driver
- Power consumption : Max 40 W

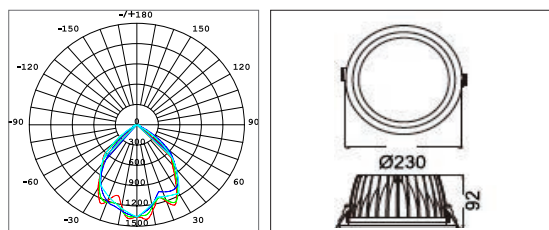

OPTIONS:

- Dimmable Driver 1 - 10 / DALI
- Backup Emergency Kit 1H/3H
- Other Colour Temp.: 3000k/4000k/6000k
- Frosted / Semi frosted glass diffuser

MOUNTING SYSTEM

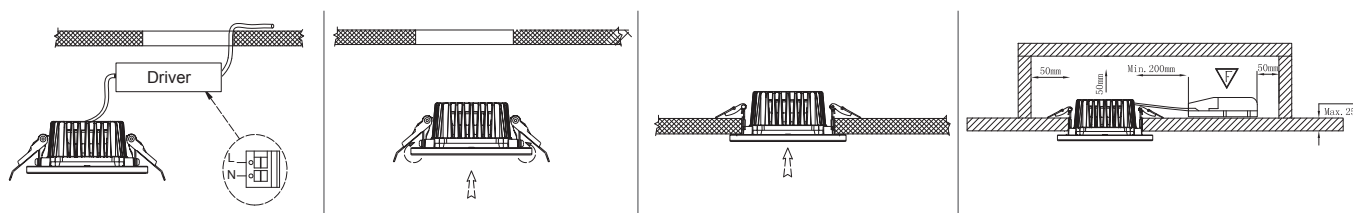

Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 4777 700
Fax: +966 11 4789 469

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com