

SURFACE MOUNTED

SURFLUX T5



SPECIFICATIONS :

Mounting	: Ceiling mounted
Lamp type	: T5
Lamp holder	: G5
Control gear type	: Electronic
Voltage rating/ freq.	: 220-240V / 50-60 Hz
Power factor	: >0.95
Degree of protection	: IP 20
Internal wiring	: 0.5 mm sq. solid copper wire, PVC 105 deg C
Cable entry	: 16mm dia. hole on bottom of the housing
Cable connection	: Terminal block, 3-pole, screw type with grounding
Conformity	: IEC 60598 / SASO 1318
Light controller	: SP-S/DP-S/SP-M/DP-M

DESCRIPTIONS : SURFLUX T5 is a ceiling mounted luminaire of 0.6 mm steel housing finished with 3-stages pretreatment electrostatic powder coating. The aluminum optic is used with purity higher than 99% and reflectance higher than 80%. Energy efficiency is obtained using an electronic ballast with PF higher than 0.95.


APPLICATIONS : Offices, meeting rooms and apartments.

CODE	L	W	H	CODE	L	W	H
SUR-T5-3/4X14WE/SP-S	600	600	50	SUR-T5-2X14WE/SP-S	600	300	50
SUR-T5-3/4X14WE/DP-S	600	600	50	SUR-T5-2X14WE/DP-S	600	300	50
SUR-T5-3/4X14WE/SP-M	600	600	50	SUR-T5-2X14WE/SP-M	600	300	50
SUR-T5-3/4X14WE/DP-M	600	600	50	SUR-T5-2X14WE/DP-M	600	300	50


OPTIONS:
 - Gear (DIM) (DALI)
 - Emergency Kit (EM1.5) (EM3)



Ordering Example



Mounting System

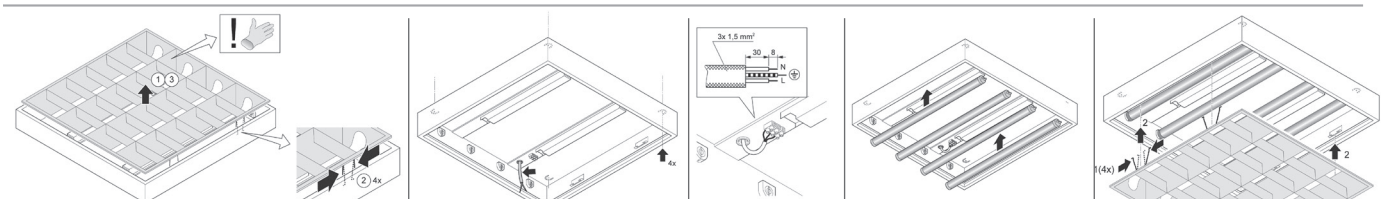

SURFACE MOUNTED

SURFLUX T5



SPECIFICATIONS :

Mounting	: Ceiling mounted
Lamp type	: T5
Lamp holder	: G5
Control gear type	: Electronic
Voltage rating/ freq.	: 220-240V / 50-60 Hz
Power factor	: >0.95
Degree of protection	: IP 20
Internal wiring	: 0.5 mm sq. solid copper wire, PVC 105 deg C
Cable entry	: 16mm dia. hole on bottom of the housing
Cable connection	: Terminal block, 3-pole, screw type with grounding
Conformity	: IEC 60598 / SASO 1318
Light controller	: SP-S/DP-S/SP-M/DP-M

DESCRIPTIONS : SURFLUX T5 is a ceiling mounted luminaire of 0.6 mm steel housing finished with 3-stages pretreatment electrostatic powder coating. The aluminum optic is used with purity higher than 99% and reflectance higher than 80%. Energy efficiency is obtained using an electronic ballast with PF higher than 0.95.

APPLICATIONS : Offices, meeting rooms and apartments.

CODE	L	W	H
SUR-T5-3X28WE/SP-S	1200	600	50
SUR-T5-3X28WE/DP-S	1200	600	50
SUR-T5-3X28WE/SP-M	1200	600	50
SUR-T5-3X28WE/DP-M	1200	600	50



CODE	L	W	H
SUR-T5-2X28WE/SP-S	1200	300	50
SUR-T5-2X28WE/DP-S	1200	300	50
SUR-T5-2X28WE/SP-M	1200	300	50
SUR-T5-2X28WE/DP-M	1200	300	50

OPTIONS:


- Gear (DIM) [DALI]
- Emergency Kit (EM1.5) [EM3]



Ordering Example

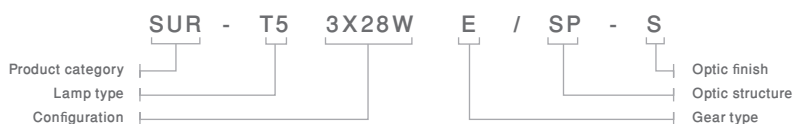

Mounting System

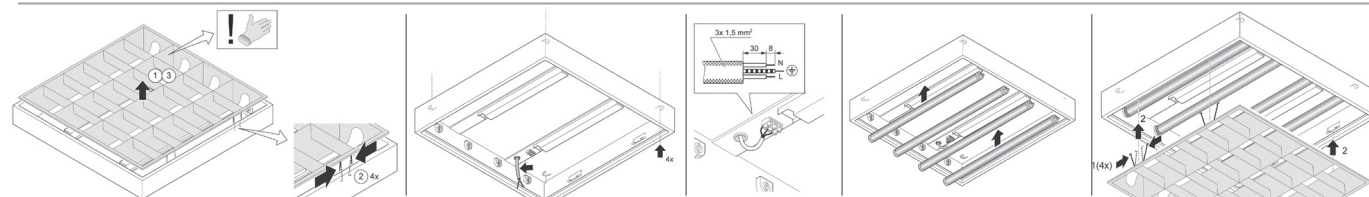

Head Office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 477 77 00
Fax: +966 11 478 94 69

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com