



# GRIDLIGHTS

FLEXILUX 4 LAMP MODULE



## SPECIFICATIONS :

Mounting	: Recessed
Lamp type	: CMD-T/HAL PAR 30/ HAL R 111
Lamp holder	: G12, GU 10
Control gear type	: Electronic
Voltage Rating/ Freq.	: 220-240V / 50-60 Hz
Power factor	: >0.95
Degree of protection	: IP 20
Internal Wiring	: 1.0 mm sq. stranded copper wire, heat resistant 130 deg C
Cable entry	: Cable gland at the top of the housing
Cable connection	: Terminal block, 3-pole, screw type with grounding
Conformity	: IEC 60598 / SASO 1318


**DESCRIPTIONS :** FLEXILUX is a gridlight recessed luminaire of 0.6 mm housing finished with 3-stages pretreatment electrostatic black powder coating. The trim is made of die casted aluminum. The aluminum optic is used with purity higher than 99% and reflectance higher than 80% for LOR reaches up to 100%. clear anodized finish. DIAL certified photometry. Energy efficiency is obtained using an electronic ballast.

**APPLICATIONS :** Department stores and fashion shops.


CODE	L	W	H
GL4-CDM-T-150WE/CA-M-CTG [SI]	345	318	173
GL4-CDM-T-70WE/CA-M-CTG [SI]	345	318	173
GL4-HAL PAR30-150WE [SI]	345	318	173
GL4-HAL PAR30-75WE [SI]	345	318	173
GL4-HAL R111-100WE [SI]	345	318	173
GL4-HAL R111-75WE [SI]	345	318	173
GL4-HAL R111-50WE [SI]	345	318	173

### OPTIONS:


- Gear (DIM) [DALI]
- Emergency Kit (EM1.5) [EM3]



GL4-HAL R111-100WE [SI] LOR 100%  
For the rest refer to page - 437



## Ordering Example

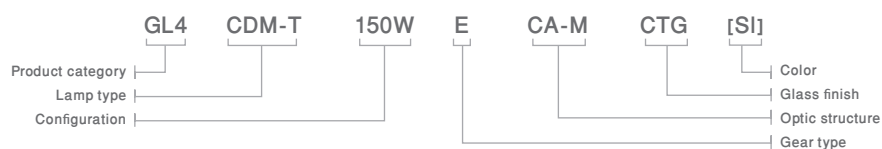

### **Head office**

Malaz - Salahidin Road  
P.O Box 1246 Riyadh 11431

Tel : +966 11 477 77 00  
Fax: +966 11 478 94 69

### **Western Region Office**

Tahliya Street  
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888  
Fax: +966 12 6633413

### **Eastern Region Office**

King Abdulaziz Street  
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509  
Fax: +966 13 8329065

ContactUs@noortek.com



**[www.noortek.com](http://www.noortek.com)**