





SPECIFICATIONS :

Housing	: Die-cast aluminium
Lamp Type	: MH / HPS
Lamp holder	: E40
Voltage rating/ freq.	: 220-240V / 50-60 Hz
Control gear type	: HPF conventional control gear
Degree of protection	: IP 65
Optical configuration	: High quality aluminium reflector
Glass	: Tempered protection glass
Suitable arm size	: 60 mm

DESCRIPTIONS : STRLUX SERIES is a high quality street lighting family that was for poles up to 12m. Using of die-cast aluminium, tempered protection glass makes this series suitable for outdoor applications of IP65. Designed for use with MH/HPS lamps up to 400W.

APPLICATIONS : Street lighting, side ways and other similar applications

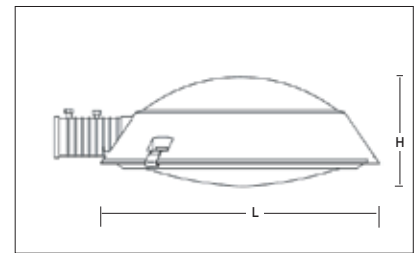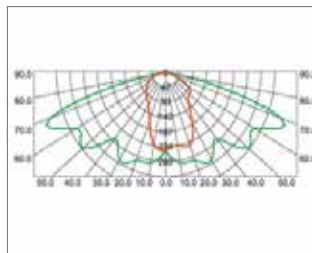

CODE	L	W	H
STRTLUX-{N06-001}-ROU_OSL-MH-150W-CON/SBG-S	480	480	220
STRTLUX-{N06-001}-ROU_OSL-SON-T-150W-CON/SBG-S	480	480	220
STRTLUX-{N06-001}-ROU_OSL-MH-250W-CON/SBG-S	480	480	220
STRTLUX-{N06-001}-ROU_OSL-SON-T-250W-CON/SBG-S	480	480	220
STRTLUX-{N06-001}-ROU_OSL-MH-400W-CON/SBG-S	680	680	220
STRTLUX-{N06-001}-ROU_OSL-SON-T-400W-CON/SBG-S	680	680	220

