



DOWNLIGHTS

HALUX 4" S 100W/IP44

DOWNLIGHTS

HALUX 4" R 50W IP44



SPECIFICATIONS :

Mounting	: Ceiling recessed
Lamp type	: Halogen
Lamp holder	: GU5.3
Control gear type	: Electronic
Voltage Rating/ Freq.	: 220-240V / 60 Hz
Power factor	: >0.95
Degree of protection	: IP 44
Internal Wiring	: 0.5 mm sq. solid copper wire PVC 105 deg C
Cable connection	: Terminal block, 2-pole, screw type with grounding
Conformity	: IEC 60598 / SASO 1318
Light controller	: CTG

DESCRIPTIONS : HALUX 4" Round is a recessed luminaire of die casted aluminum finished with 3-stages pretreatment electrostatic powder coating. The trim is made of die casted aluminium. High ingress protection degree (IP44) is available for wet areas. The aluminum optic is used with purity higher than 99% and reflectance higher than 80%. Clear anodized finish. Energy efficiency is obtained using an electronic transformer.



APPLICATIONS : Decorative lighting scenes in shops, malls and fancy offices.

CODE	D	H
DLR[4"]-HAL-50WE/CA-CTG [WH] [IP44]	110	135


OPTIONS:

- Gear (DIM)
- Emergency Kit (EM1.5) (EM3)
- Reflector (ASSY)
- Trim Color [WH] [BR] [CR] [AU] [NI] [SI]

Ordering Example

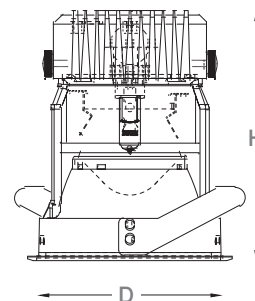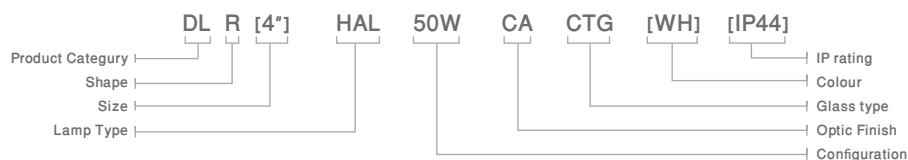

Mounting System

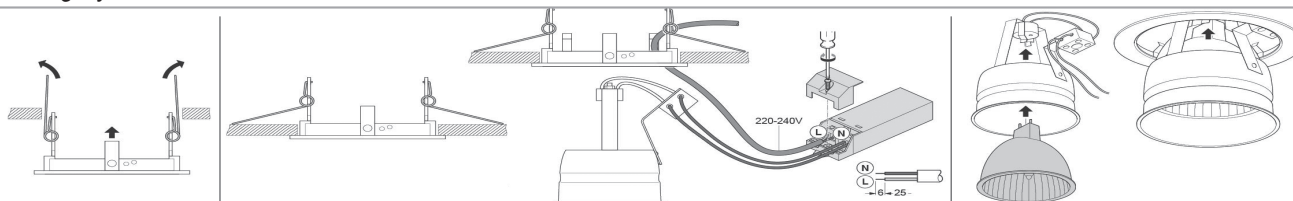

Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 477 77 00
Fax: +966 11 478 94 69

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com