



LED - D8XS
IP65

LED DOWNLIGHTS



DESCRIPTIONS

The D8XS is a recessed square LED downlight series with high quality die-cast aluminum body in powder-coated, equipped with wide anti-glare, 60° reflector, available in different trims and reflectors option. Excel-lent heat sink capability to minimize the luminous degradation, remote LED driver.

APPLICATIONS


Wet locations, swimming pools, under canopy, residential etc.




SPECIFICATIONS

Mounting	Ceiling recessed
LED module type	COB LED chips
Voltage rating/ freq.	220-240V / 50-60 Hz
Driver	Electronic LED driver
Power factor	>0.95
Degree of protection	IP 65
Light controller	Clear tempered glass
Standard color temp.	3000K/4200K/6500K
Operating temperature	-10 : 40°C
Rated lifetime (L70)	50,000 Hrs (@25C°)

PHOTOMETRIC DATA

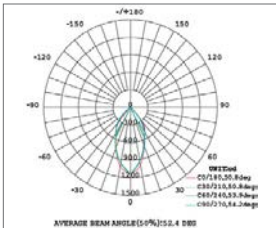

DIMENSIONS

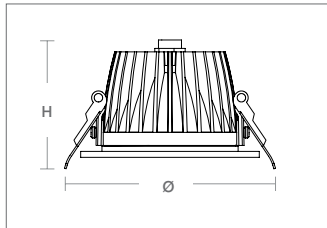


CODE	Wattage	Lumin	IP Rate	Color Temp.	Beam Angle	Ø	H
LED-D81S-10W/4K	10W	900LM	IP65	3K/4K/6.5K	95	105	62.5
LED-D82S-15W/4K	15W	1350LM	IP65	3K/4K/6.5K	130	145	69.9
LED-D83S-20W/4K	20W	1800LM	IP65	3K/4K/6.5K	175	190	92
LED-D84S-30W/4K	30W	2700LM	IP65	3K/4K/6.5K	200	230	92
LED-D84S-40W/4K	40W	3600LM	IP65	3K/4K/6.5K	200	230	92

OPTIONS:

- Dimmable Driver 1 - 10 / DALI
- Backup Emergency Kit 1H/3H
- Other Colour Temp.:3000K/4000K/6500K
- Frosted / Semi frosted glass diffuser

MOUNTING SYSTEM

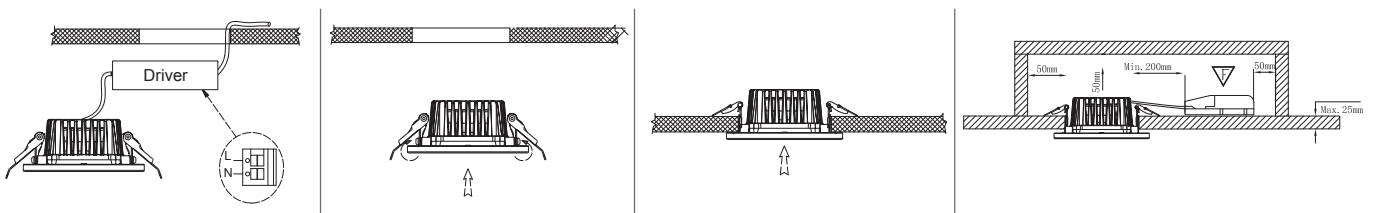

Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 4777 700
Fax: +966 11 4789 469

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com