




LED COVE LIGHT

LED INDOOR



HIGH CRI >80
Technology SMD


DESCRIPTIONS

This product is specially designed for cove lighting area that require high protection degree. Thanks for the slim and nice aluminum profile housing that keep the LED chip cool at the highest performance. Great for facade architectural light designs specially towers and malls.

APPLICATIONS

Outdoor facade, wet area , cove light etc.

DIMENSIONS

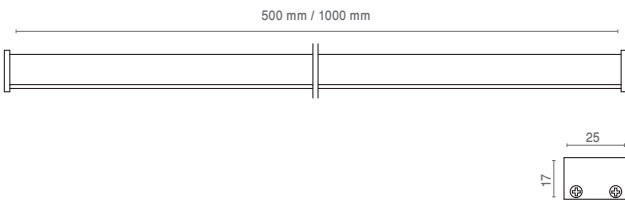

SPECIFICATIONS

Housing	Aluminum profile housing
Diffuser	Clear poly carbonate
Lamp type	12V DC / 24V DC
Working Voltage	220-240V / 50-60 Hz
Driver	Remote LED constant voltage driver (included)
Power factor	>0.95
Degree of protection	IP 40
Standard color temp.	3000K/4000K/6500K
Operating temperature	- 10 : 40°C
Rated lifetime (L70)	50,000 Hrs (@25C°)

CODE	Wattage	Lumin /MT	IP Rate	Chip Qty. (pcs)	LED Color
NRS-LED-5X14.4W/S	14.4W	570	IP40	48	Single Color
NRS-LED-5X14.4W/RGB**	14.4W	570	IP40	48	RGB

No. Of Units	Connect Way	Wattage
1	In Series	16W
2	In Series	26W
3	In Series	32W
4	In Series	36W
5	In Series	39W

Note:
> RGB drivers and DMX controller to be propose separately as per site requirements.

** Normal delivery for this product is a set of 5 separate unit, measured wattage as follows :

Table that shows system wattage as per number of units connected series



12V DC / 24V DC
70W/150W
Power supply
IP 20



12V DC/ 24V DC
70W/150W
Power supply
IP 67



DMX512 Decoder/Driver



DMX512 Controller



Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 4777 700
Fax: +966 11 4789 469

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com